

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
16 June 2005 (16.06.2005)

PCT

(10) International Publication Number
WO 2005/053487 A1

(51) International Patent Classification⁷: **A47J 31/20**

(21) International Application Number:
PCT/GB2004/004969

(22) International Filing Date:
25 November 2004 (25.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0327624.3 27 November 2003 (27.11.2003) GB
0327626.8 27 November 2003 (27.11.2003) GB

(71) Applicants (for all designated States except US): **MONO CONTAINERS LIMITED** [GB/GB]; Dragonville Industrial Estate, Durham DH1 2RL (GB). **TETLEY G.B. LIMITED** [GB/GB]; 325 Oldfield Lane North, Greenford, Middlesex UB6 0AZ (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **URQUHART,**

Kevin [GB/GB]; 1 The Uplands, Birtley, County Durham DH3 1RJ (GB). **HOSEIN, Riad** [GB/IE]; 7 Woodstown Close, Knocklyon, Dublin 16 (IE). **BHAMRA, Rani** [GB/GB]; Waverley Cottage, 13 Waverley Road, Weybridge, Surrey KT13 8UT (GB).



(74) Agents: **WARREN, Keith, Stanley et al.**; Baron & Warren, 19 South End, Kensington, London W8 5BU (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE,

[Continued on next page]

(54) Title: **BREWING AND DRINKING RECEPTACLE**

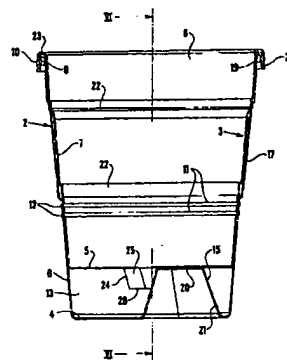

(57) Abstract: A brewing and drinking receptacle comprises an outer cup (2), an inner cup (3) nested within the outer cup and turnable relatively thereto, and an ingredient chamber (13) formed between mutually opposed bottom walls (4, 5) of the nested cups. A brewing aperture (14) which may be a perforated section, is formed in the bottom wall (5) of the inner cup and communicates with the ingredient chamber. A shut-off boss (15) projecting upwardly from the bottom wall (4) of the outer cup within the ingredient chamber is arranged to control liquid flow through the brewing aperture. The outer and inner cups (2, 3) are turnable relatively to one another selectively to admit or shut off flow of water, which is added to the inner cup to produce the beverage, between the inner cup and the ingredient chamber (13), via the brewing aperture. This enables the water to be mixed or infused with the ingredient in a controlled fashion and for the flow of beverage between the ingredient chamber and the inner cup to be shut off when the beverage achieves the desired strength. A paddle member (24) projects into the ingredient chamber from the bottom wall (5) of the inner cup so as to squeeze and/or agitate the ingredient in the ingredient chamber (13) in response to relative turning movement of the cups and thereby enhance mixing or infusion.



WO 2005/053487 A1



SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*